

DEEP-Y


09111


Minimal lighting in a cylindrical form

Deep-Y is a simple and elegant spotlight solution developed for modern architectural projects, featuring a cylindrical body and surface mounting design. Its extruded aluminum body and metallized reflector optics provide controlled light distribution, while its UGR≤19 value enhances visual comfort.

With a 36° beam angle, high-efficiency optical system, and compact design, it can be used in general and accent lighting applications. Available in white, gray, and black, Deep-Y adapts to various interior design concepts, combining modern aesthetics with high-performance lighting in offices, shops, hotels, restaurants, and social spaces.

RAL 9016 RAL 9005 RAL 9006

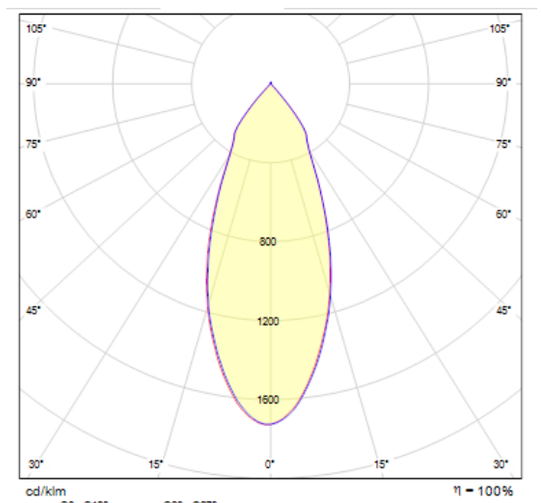



General Information	
Housing	Aluminum Extruded
Frame	Aluminum Injection
Optics	Polished Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class I
Product Dimensions [mm]	Ø80 x 100(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	10W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 19
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Kit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Kg
09111.90.30.009	10	700	36°	3000	80x100	0,40
09111.90.40.009	10	750	36°	4000	80x100	0,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com