

RAL 9016


AURACLEAN IP65


02125

Seamless aesthetics, superior hygiene performance.

Auraclean is designed for sterile areas where high hygiene standards are critical. Its screwless front glass fixing system and smooth body design help reduce particle and dirt accumulation on the surface, while its easy-to-clean structure supports hygiene requirements.

With an optional antibacterial surface, it adapts to different project needs. It offers a reliable, functional, and aesthetically pleasing solution for controlled and hygienic environments such as hospitals, clean rooms, laboratories, and pharmaceutical manufacturing facilities.

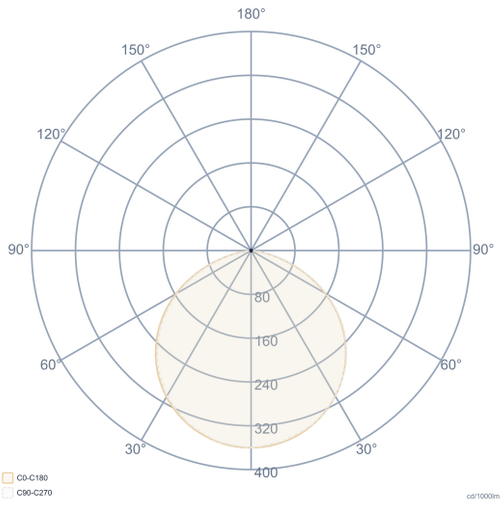

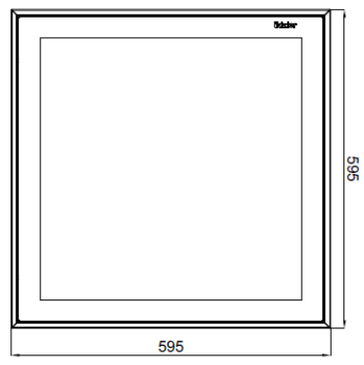



General Information	
Meterial	DKP Metal Sheet
Optics	Glass + Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	595(W) x 595(L) x 90(H)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	32-45W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +40°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02125.66.30.033.AU	32	3250	3000	595x595x100	580x580	8,20
02125.66.40.033.AU	32	3350	4000	595x595x100	580x580	8,20
02125.66.30.038.AU	37	3650	3000	595x595x100	580x580	8,20
02125.66.40.038.AU	37	3800	4000	595x595x100	580x580	8,20
02125.66.30.045.AU	45	4400	3000	595x595x100	580x580	8,20
02125.66.40.045.AU	45	4550	4000	595x595x100	580x580	8,20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com