



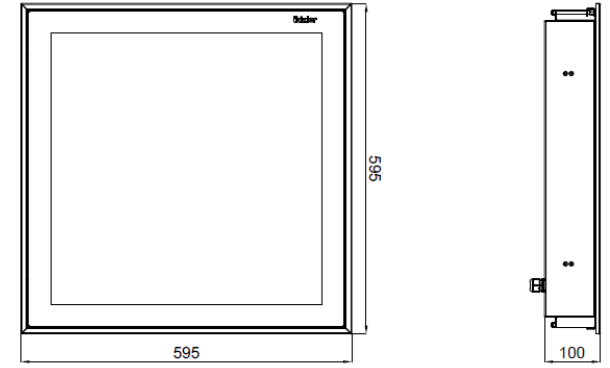

RAL 9016

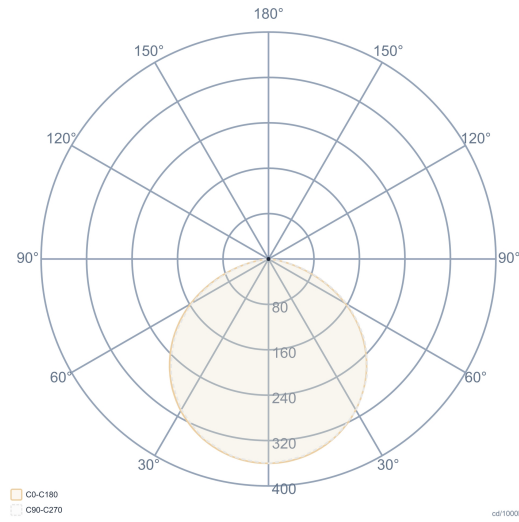

| General Information            |                            | Electrical Info            |                        | Lighting Technology                                                                                |              |
|--------------------------------|----------------------------|----------------------------|------------------------|----------------------------------------------------------------------------------------------------|--------------|
| <b>Material</b>                | DKP Metal Sheet            | <b>Power</b>               | 32-45W                 | <b>Light Output Angle</b>                                                                          | 110°         |
| <b>Optics</b>                  | Glass + Opal Diffuser      | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>                                                                                   | UGR ≤ 22     |
| <b>Paint</b>                   | Electrostatic Powder Paint | <b>Light Source</b>        | SMD Mid Power LED      | <b>CRI [Ra]</b>                                                                                    | CRI ≥ 80     |
| <b>Insulation Class</b>        | Class I                    | <b>Cabling</b>             | Halogen-Free           | <b>Color Bin Value</b>                                                                             | Mc Adams ≤ 3 |
| <b>Product Dimensions [mm]</b> | 595(W) x 595(L) x 90(H)    | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Optional</b><br>DALI / 1-10V<br>CRI>90 , 2700K~6500K , Tunable White<br>Emergency Lighting Unit |              |
| <b>Mounting Type</b>           | Recessed                   | <b>LED Driver</b>          | Constant Current       |                                                                                                    |              |
| <b>Mounting Part</b>           | Metal Bracket              | <b>Ambient Temperature</b> | -20°C / +40°C          |                                                                                                    |              |
|                                |                            | <b>LED Lifetime L70</b>    | >50.000 Hour           |                                                                                                    |              |

| Order Code         | W  | Lm   | CCT  | WxLxH (mm)  | Ceiling Cutting (mm) | Kg   |
|--------------------|----|------|------|-------------|----------------------|------|
| 02125.66.40.038.AU | 37 | 3800 | 4000 | 595x595x100 | 580x580              | 8,20 |