

# Even-GN IP65

# 02142


## IP65 Sterile Lighting Fixture

Even-GN IP65 is designed for clean and controlled indoor environments and offers IP65 protection thanks to its silicone-sealed structure. Its opal diffuser distributes light homogeneously, creating comfortable and balanced lighting in workspaces. Its metal sheet housing and sealed construction ensure reliable use in areas where dust and moisture are controlled, while its 120° wide beam angle provides even illumination on surfaces. Its 600x600 mm dimensions allow for easy integration into modular ceiling systems.

It combines aesthetic appearance, high visual comfort, and reliable performance in hospitals, laboratories, healthcare facilities, pharmaceutical production areas, corridors, and other indoor spaces requiring high hygiene standards.

CE · GLOW WIRE 650°C · IK 04 · IP 65 · RoHS COMPLIANT

RAL 9016 · RAL 9005 · RAL 9006

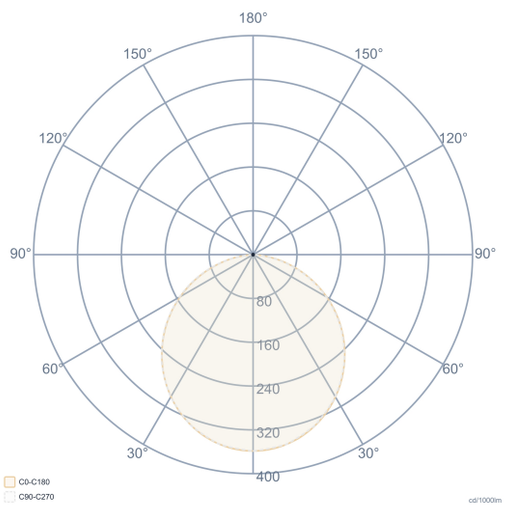





| General Information | |
|---|---|
| **Meterial** | DKP Metal Sheet |
| **Optics** | Opal Diffuser |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | 595(W)x595(L)x70(H) |
| **Mounting Type** | Recessed |
| **Mounting Part** | Metal Bracket |

| Electrical Info | |
|---|---|
| **Power** | 28-35W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | 0°C / +40°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 120° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | WxLxH (mm) | Ceiling Cutting (mm) | Kg |
|---|---|---|---|---|---|---|
| 02144.66.30.033 | 28 | 3300 | 3000 | 595x595x70 | 580x580 | 4,50 |
| 02144.66.40.034 | 28 | 3400 | 4000 | 595x595x70 | 580x580 | 4,50 |
| 02144.66.30.038 | 33 | 3850 | 3000 | 595x595x70 | 580x580 | 4,50 |
| 02144.66.40.040 | 33 | 4000 | 4000 | 595x595x70 | 580x580 | 4,50 |
| 02144.66.30.043 | 39 | 4350 | 3000 | 595x595x70 | 580x580 | 4,50 |
| 02144.66.40.045 | 39 | 4500 | 4000 | 595x595x70 | 580x580 | 4,50 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com