

# VELA IP65


# 06153


## Sensor-equipped waterproof PC

This surface-mounted sensor luminaire features a modern, minimalist design and offers uniform, comfortable lighting thanks to its UV-stabilized polycarbonate housing, opal polycarbonate diffuser, and 120° symmetrical light distribution. It is available with power options of 15W or 20W and three color temperature choices: 3000K, 4000K, or 6500K.

Its integrated sensor contributes to energy savings through a 360° detection angle, a detection range of 1–5 meters, and adjustable operating settings. It is an ideal solution for stairwells, corridors, communal building areas, and passageways.

RAL 9016

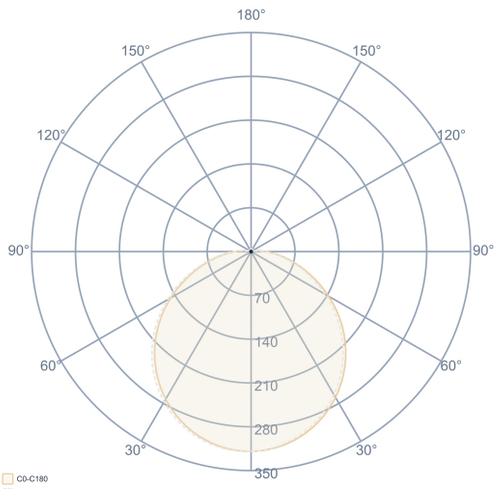

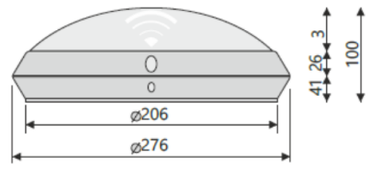
| General Information | |
|---|---|
| **Housing** | UV Additive PC Injection Molding |
| **Optics** | Opal PC Injection |
| **Gasket** | Silicone |
| **Sensor Detection Angle** | 360° |
| **Detection Distance** | 1 - 5m |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | Ø276x 100(H) |
| **Mounting Type** | Surface - max.2,8m |
| **Mounting Part** | Screw Dowel Set |

| Electrical Info | |
|---|---|
| **Power** | 15W-20W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -5°C / +55°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 120° |
| **Light Detection** | 2-2000 Lux |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | CRI | ØD x H (mm) | Kg |
|---|---|---|---|---|---|---|
| 06153.27.30.012 | 15 | 1100 | 3000 | Ra>80 | Ø276x100 | 1,30 |
| 06153.27.40.012 | 15 | 1200 | 4000 | Ra>80 | Ø276x100 | 1,30 |
| 06153.27.65.012 | 15 | 1300 | 6500 | Ra>80 | Ø276x100 | 1,30 |
| 06153.27.30.022 | 20 | 2100 | 3000 | Ra>80 | Ø276x100 | 1,30 |
| 06153.27.40.022 | 20 | 2200 | 4000 | Ra>80 | Ø276x100 | 1,30 |
| 06153.27.65.022 | 20 | 2300 | 6500 | Ra>80 | Ø276x100 | 1,30 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com