



VELA IP65

06152


Sensor-equipped waterproof PC

This sensor-equipped surface-mounted luminaire features a modern and minimalist design; its UV-resistant PC body, opal polycarbonate diffuser, and 120° symmetrical light distribution provide homogeneous and comfortable illumination. With 15W of power, a 3000K color temperature, and 1050 lm of luminous flux, it delivers efficient performance.

Its integrated sensor contributes to energy savings with its 360° detection angle, 1-5 m detection distance, and adjustable operating features. It is an ideal solution for stairwells, hallways, building common areas, and passageways.



RAL 9016

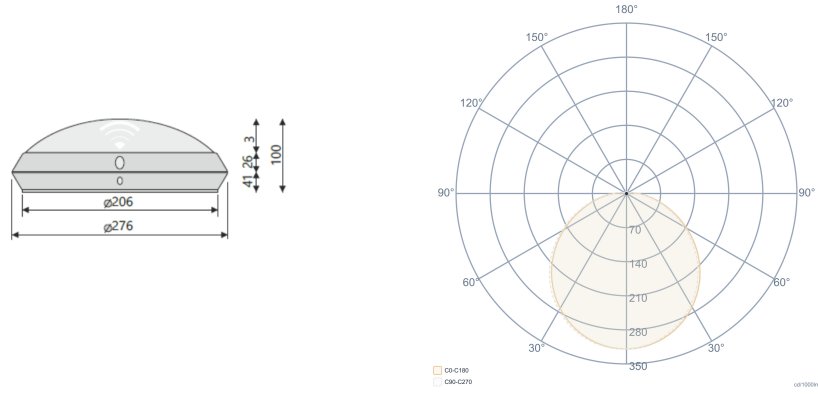

General Information		Electrical Info		Lighting Technology	
Housing	UV Additive PC Injection Molding	Power	15W	Light Output Angle	120°
Optics	Opal PC Injection	Power Factor	>0.95	Light Detection	2-2000 Lux
Gasket	Silicone	Light Source	SMD LED	UGR Value	UGR ≤ 22
Sensor Detection Angle	360°	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
Detection Distance	1- 5m	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	LED Driver	Constant Current	Optional	
Product Dimensions [mm]	Ø276x 100(H)	Ambient Temperature	-5°C / +55°C		
Mounting Type	Surface - max.2,8m	LED Lifetime L70	>50.000 Hour		
Mounting Part	Screw Dowel Set				
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
06153.27.40.012	15	1200	4000	Ø276x100	1,30

