



Tetr's-T

03125

RAL 9005 RAL 9006

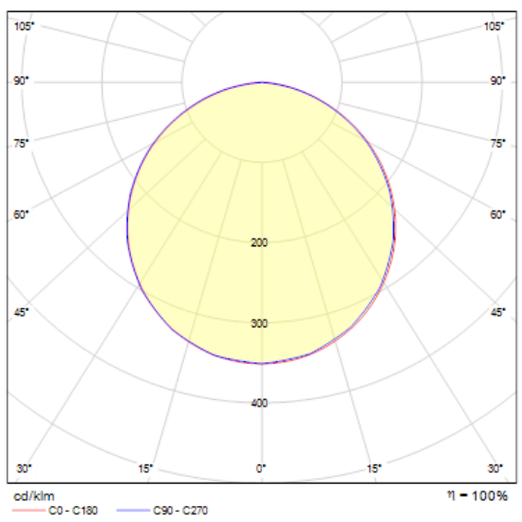

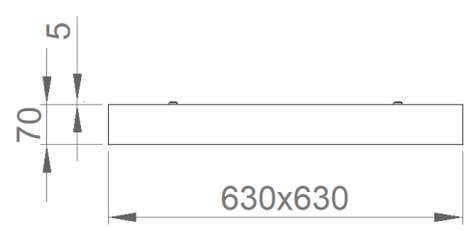

General Information	
Meterial	Metal Sheet
Diffuser	High Transmittance Opal Diffuser
Paint	Electrostatic Powder Coating

Electrical Info	
Power	28W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional	
DALI / 1-10V	1-10V DIM
Tunable White	Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White	2700K ~ 6500K
Different RAL Color Options	Plug-in Connector
Class-II Protection Class	PIR Sensor
AC-DC Supply(MBS)	

Order Code	W	Lm	Lm	CRI	WxLxH (mm)	Kg
03125.66.30.032	28	2930	3000	Ra>80	630x630x70	4,1
03125.66.40.033	28	3100	4000	Ra>80	630x630x70	4,1

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com