

Perla-K2
Spot Lighting/Recessed

05481

220-240V
50/60Hz

Ra>80

IP
40IK
02

LED

Product
CodePower
(W)
Ø Cut-out
(mm)Lümen Çıkışı
Lumen Output
(lm)Renk Sıcaklığı
Color Temperature
(K)

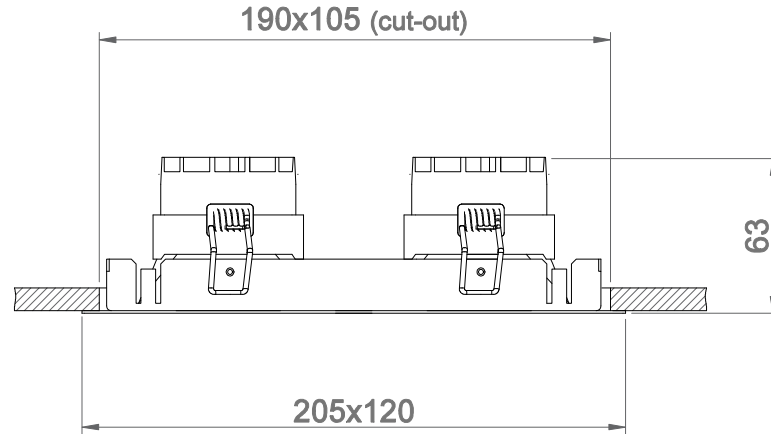
05481.11.40.021

2x11

190x105

2 x 990

4000

 **UYARI**

- Bakım ve montaj yalnızca kalifiye personel tarafından yapılmalıdır. Tüm elektrik bağlantıları elektrikçi tarafından yapılmalıdır.
- Armatür montajı veya ampul değiştirme işleminden önce elektrik bağlantısı kesilmelidir.
- Armatür termal yalıtım malzemesi ile kaplanmaya uygun değildir.
- Armatürler iletken yüzeylere montaj yapılamaz.
- Onarım ve bakım sırasında yalnızca orijinal parçalar kullanılmalıdır.
- Eğer armatürde sonradan değişiklik yapılırsa, değişiklikten sorumlu, üretici olarak kabul edilecektir.
- Üretici uygunsuz kullanım ya da uygulama sebebiyle meydana gelen hasar konusunda sorumluluk kabul etmez.

 **WARNING**

- Installation / maintenance only by skilled personnel. All electrical connections have to be performed by an electrician.
- The electrical connection must be disconnected before fitting the luminaire or replacing the bulb.
- The luminaires are not allowed to be mounted on conductive surface.
- During overhaul / maintenance only use original parts.
- If any luminaire is subsequently modified, the person, responsible for the modification shall be considered the manufacturer.
- The manufacturer bears no liability for damage caused by inappropriate use or application.