



GLARE-T



Color Options



Housing	Electrostatic coated steel sheet
Optics	Highly transmissive opal diffuser
Reflector	Deglaring glossary aluminum reflector (UGR<19)
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

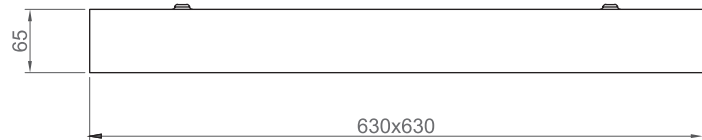

Order Code	W	Lm	CCT	CRI	Kg
03500.66.30.028	35	3135	3000	Ra>80	4,9
03500.66.40.030	35	3300	4000	Ra>80	4,9