





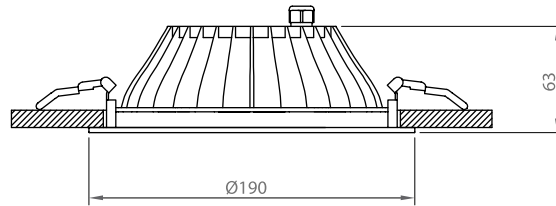


Color Options



Housing	Die-cast aluminium with electrostatic coating
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit



OPTIONS

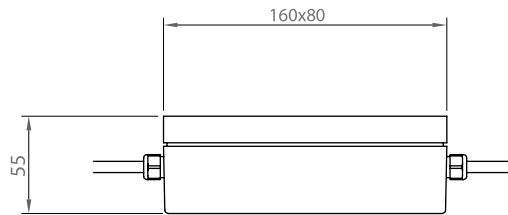

Order Code	W	Lm	CCT	CRI	Cut-out (mm)	Kg
05395.19.30.011	13	1300	3000	Ra>80	Ø175	0,9
05395.19.30.015	19	1900	3000	Ra>80	Ø175	0,9
05395.19.40.012	13	1370	4000	Ra>80	Ø175	0,9
05395.19.40.016	19	2000	4000	Ra>80	Ø175	0,9