





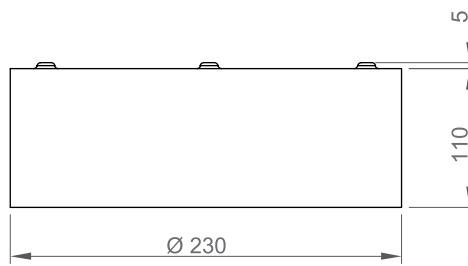

Color Options

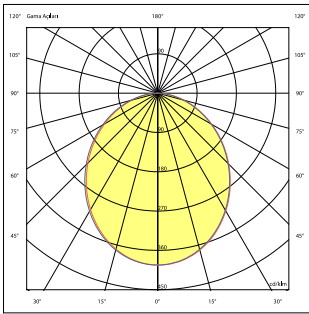

Housing	Electrostatic coated aluminum
Optics	Highly transmissive opal diffuser
Light Source	High efficacy SMD Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit



Order Code	W	Lm	CCT	CRI	Kg
03170.23.30.016	18	1620	3000	Ra>80	1,2
03170.23.30.023	23	2232	3000	Ra>80	1,2
03170.23.40.017	18	1688	4000	Ra>80	1,2
03170.23.40.024	23	2325	4000	Ra>80	1,2