




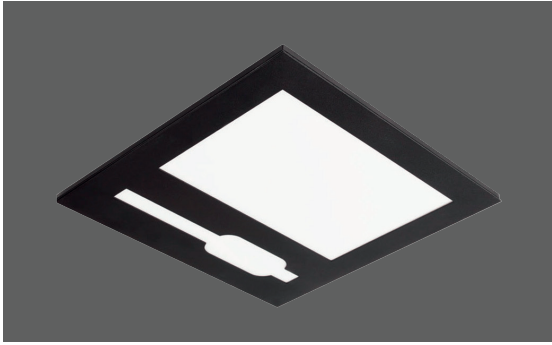


Color Options

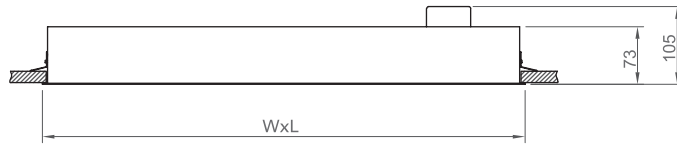


Housing	Electrostatic coated steel sheet
Diffuser	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit



Ceiling Type-Cut-out



02121.66..



02120.33..

Order Code	W	Lm	CCT	CRI	W x L (mm)	Kg
02121.66.30.032	31	3200	3000	Ra>80	595x595	4,1
02120.33.30.008	9	800	3000	Ra>80	295x295	2,1
02121.66.40.033	31	3300	4000	Ra>80	595x595	4,1
02120.33.40.009	9	850	4000	Ra>80	295x295	2,1