

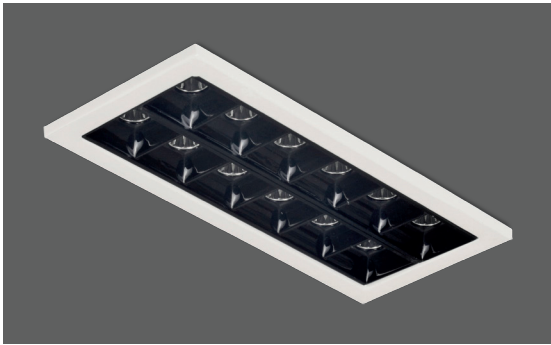
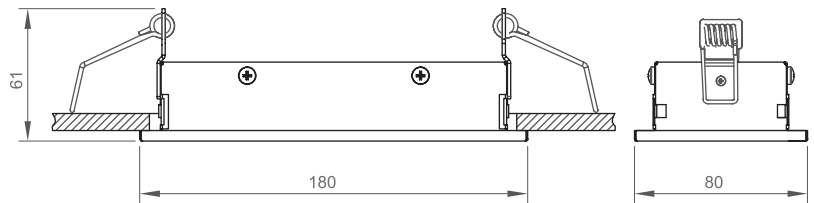


STYLED-W

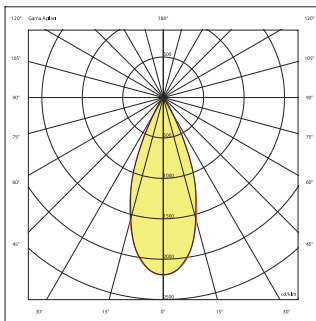

Housing	Electrostatic coated steel sheet
Reflector	Highly efficient vacuumed aluminum coated PC reflector and deglaring diffuser combined with thermoplastic reflector (UGR<17)
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

Color Options



Order Code	W	Lm	Beam Angle	CCT	CRI	Cut-out (mm)	Kg
05249.18.30.013	9	970	36°	3000	Ra>80	170x70	0,5
05249.18.40.015	9	1020	36°	4000	Ra>80	170x70	0,5