



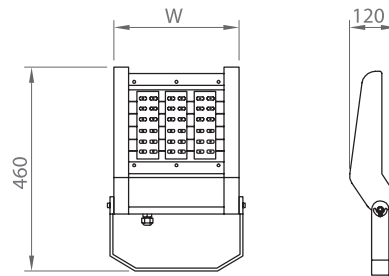

Housing	Electrostatic coated aluminum
Optics	Highly transmissive acrylic optic lens
Glass	Tempered and clear
Light Source	MacAdam Step-3 high efficacy High Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Lens Options	10°-25°-45°-120°
Options	54 W-100 W -20C/+50C 150W -20C/+40C

Color Options  Ral 9005



Order Code	W	Lm	CCT	CRI	W x L	Kg
09290.24.40.061	54	6100	4000	Ra>80	255x480	7,3
09290.24.40.077	76	7700	4000	Ra>80	255x480	7,3
09290.34.40.111	100	11100	4000	Ra>80	305x480	7,5
09290.44.40.162	151	16150	4000	Ra>80	405x480	7,9