



DUET

Timesless journey of light

TRACK LIGHTING

> www.ikizlerlighting.com

 **ikizler**
"worth the light"




Sparrow

Sparrow is a compact and elegant and track light that fits the retail industry comfortably with its modern structure. Adjustable body is designed to direct the light for object lighting. Sparrow offers the best light quality by using innovative lenses to optimize the contrast, and yet minimizes glare effect with the lenses used.



Sparrow

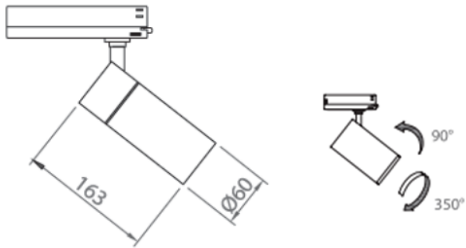


Color Options



Ral 9016

Housing	Extruded aluminum profile with electrostatic coating
Reflector	Anodized aluminum reflector
Light Source	High efficacy COB LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali



Order Code	W	Lm	Beam Angle	CCT	CRI	Kg
05668.80.30.017	15	1720	24°	3000	Ra>80	1,2
05668.80.30.021	20	2100	24°	3000	Ra>80	1,2
05668.80.40.018	15	1820	24°	4000	Ra>80	1,2
05668.80.40.022	20	2230	24°	4000	Ra>80	1,2



MODUS DC



MODUS



MODUS BOX

 **ikizler**

Modus

MODUS series is an adjustable track lighting family developed for object lighting. Thanks to the diversity of light sources, MODUS family meets the needs of all kinds of applications, especially in professional spaces such as retail stores, offices, typical residences, and exhibition areas.


DALI controlling option is also available. Fixture can be applied directly to the ceiling or 3-circuit tracks.

MODUS Series comes with three variations:
MODUS-S: Driver is Integrated Into the body.
MODUS-DC: Driver is Integrated to the track adaptor.

MODUS-BOX: Driver is Integrated In a separate box and a second rotation can be done from this box.



Modus

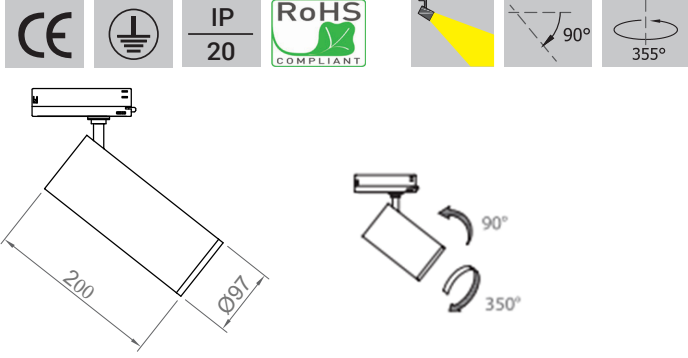

Color Options



Ral 9016




Ral 9006




Ral 9005

Housing	Extruded aluminum profile with electrostatic coating
Reflector	Anodized aluminum reflector
Light Source	High efficacy COB LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 12°/38 ° Reflector Beam Angel




Order Code	W	Lm	Beam Angle	CCT	CRI	Kg
05628.97.30.026	27	2960	24°	3000	Ra>80	1,2
05628.97.30.017	19	2110	24°	3000	Ra>80	1,2
05628.97.40.027	27	3115	24°	4000	Ra>80	1,2
05628.97.40.018	19	2220	24°	4000	Ra>80	1,2

Modus DC


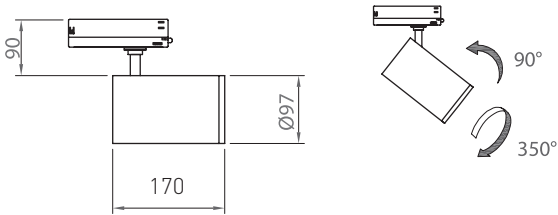


Housing	Extruded aluminum profile with electrostatic coating
Reflector	Anodized aluminum reflector
Light Source	High efficacy COB LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 12°/38 ° Reflecto Beam Angel



Order Code	W	Lm	Beam Angle	CCT	CRI	Kg
05638.97.30.028	30	3330	24°	3000	Ra>80	1,2
05638.97.30.017	19	2110	24°	3000	Ra>80	1,2
05638.97.40.029	30	3510	24°	4000	Ra>80	1,2
05638.97.40.018	19	2220	24°	4000	Ra>80	1,2


Modus Box

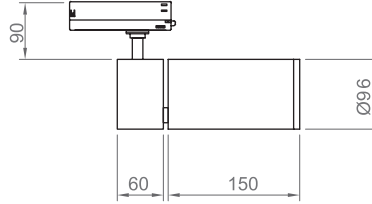

Color Options



Housing	Extruded aluminum profile with electrostatic coating
Reflector	Anodized aluminum reflector
Light Source	High efficacy COB LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 12°/38 ° Reflecto Beam Angel




Order Code	W	Lm	Beam Angle	CCT	CRI	Kg
05678.97.30.028	30	2960	24°	3000	Ra>80	1,2
05678.97.30.017	19	2110	24°	3000	Ra>80	1,2
05678.97.40.029	30	3115	24°	4000	Ra>80	1,2
05678.97.40.018	19	2220	24°	4000	Ra>80	1,2



DUET TRACK LIGHT

DUET Series track lights come in two sizes and they can be used on ceiling direct or in 3-circuit tracks. With this DUET offers a wide variety of usage scenarios. It works perfect as a wallwasher focused on object lighting and can be tilted up to 75 degrees vertical - 360 degrees horizontal.

DUET - R

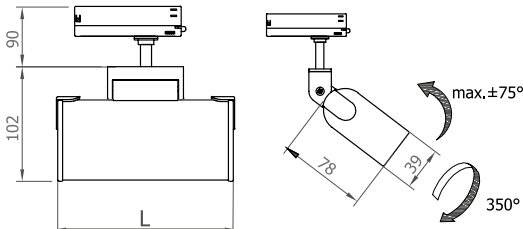

Color Options



Ral 9016



Ral 9006



Ral 9005

Housing Extruded aluminum profile with electrostatic coating


Reflector Highly efficient, aluminum coated, vacuumed PC reflector and deglaring (UGR<16)

Light Source High efficacy High Power LED with lifetime L80B50 > 50,000h

Driver Constant current output, Pf>0.90



Supply Voltage 220-240V/50-60Hz

Ambient Temperature -20C°/+40C°



Order Code	W	Lm	Beam Angle	CCT	CRI	L	Kg
01189.37.30.011	11	1100	36°	3000	Ra>80	145	0,45
01189.37.30.021	22	2200	36°	3000	Ra>80	275	0,75
01189.37.40.012	33	3300	36°	3000	Ra>80	550	1,15
01189.37.40.022	11	1200	36°	4000	Ra>80	145	0,45
01189.37.30.036	22	2400	36°	4000	Ra>80	275	0,75
01189.37.40.038	33	3600	36°	4000	Ra>80	550	1,15


DUET - T

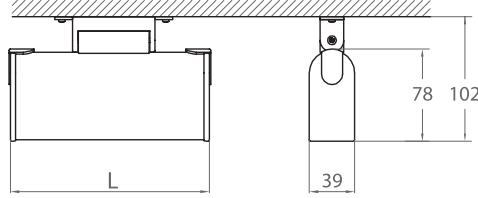

Color Options

Ral 9016 Ral 9006 Ral 9005

Housing	Extruded aluminum profile with electrostatic coating
Reflector	Highly efficient, aluminum coated, vacuumed PC reflector and deglaring (UGR<16)
Light Source	High efficacy High Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°



Sipariş Kodu	W	Lm	Açı (°)	CCT	CRI	L	Kg
01199.37.30.021	22	2200	36°	3000	Ra>80	275	0,7
01199.37.40.012	33	3300	36°	3000	Ra>80	550	1,1
01199.37.30.036	22	2400	36°	4000	Ra>80	275	0,7
01199.37.40.038	33	3600	36°	4000	Ra>80	550	1,1

İkizler Aydınlatma Armatürleri San. ve Tic. A.Ş.

Head Office

Girne Mah. Irmak Sok. Küçükyalı San. Sit.
F Blok Apt. No: 72 F/18 - Maltepe
İSTANBUL / TURKEY

Factory

3. Organize San. Böl. 1. Yol.
No: 68 Soğucak Köyü Söğütli
SAKARYA / TURKEY

> www.ikizlerlighting.com | E: info@ikizlerlighting.com

