

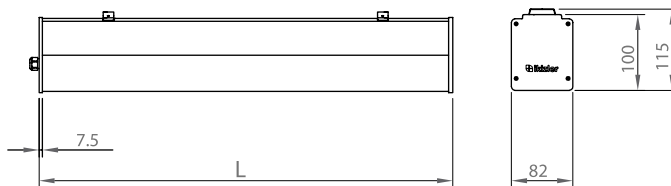


WATERLINE



Housing	Extruded aluminum profile with electrostatic coating
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

Color Options



Order Code	W	Lm	K	CRI	L (mm)	Kg
01193.81.30.020	21	1800	3000	Ra>80	590	2,2
01193.81.30.030	31	2700	3000	Ra>80	870	2,5
01193.81.30.041	42	3600	3000	Ra>80	1150	2,9
01193.81.30.052	52	4500	3000	Ra>80	1430	3,3
01193.81.30.063	62	5400	3000	Ra>80	1710	3,8
01193.81.40.022	21	1900	4000	Ra>80	590	2,2
01193.81.40.032	31	2860	4000	Ra>80	870	2,5
01193.81.40.043	42	3800	4000	Ra>80	1150	2,9
01193.81.40.054	52	4770	4000	Ra>80	1430	3,3
01193.81.40.065	62	5720	4000	Ra>80	1710	3,8