


kuruluş 1982



OUTDOOR LIGHTING

1 | PERIMETER LIGHTING


ALFOT

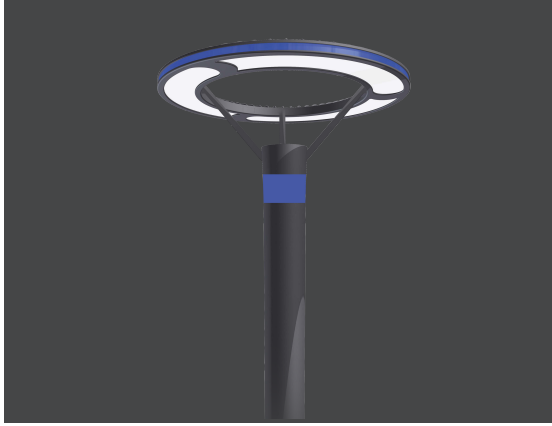


**Colour
Options**



Ral 7016



Body	Powder coated corrosion resistant aluminium
Optics	Opal lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240/50-60 Hz
Option	Dali 3000K-4000K



Order Code	W	Lm	CCT	CRI	L
09494.63.60.042	40	4080	6000	Ra>70	3500
09494.64.60.075	60	7190	6000	Ra>70	4000
09494.65.60.089	75	8560	6000	Ra>70	5000


TRIGON




**Colour
Options**



Ral 7016




Body	Powder coated corrosion resistant aluminium
Glass	Tempered transparent
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

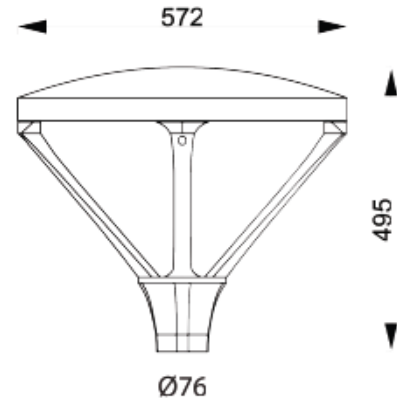

Order Code	W	Lm	CCT	CRI	L
09291.15.40.036	40	5080	6000	Ra>70	4000
09493.55.60.107	75	9300	6000	Ra>70	5000
09493.56.60.145	90	11160	6000	Ra>70	6000


PANORAMIC S

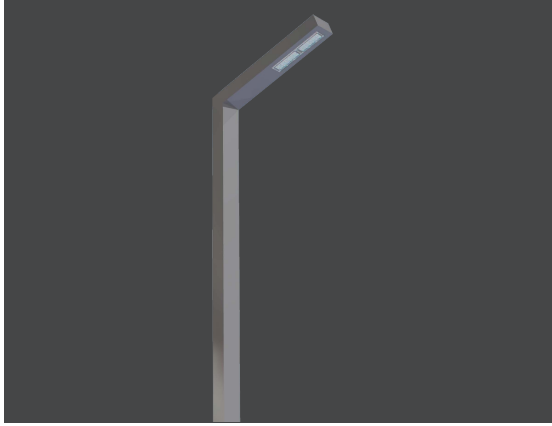


Colour
Options



Ral 7016



Body	Powder coated corrosion resistant aluminium
Optic	High light transmission acrylic optical lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

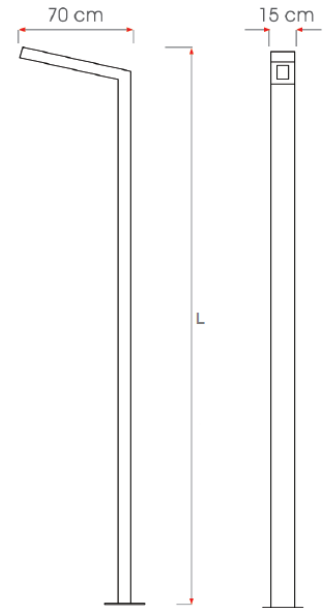

Order Code	W	Lm	CCT	CRI	L
09492.73.60.036	1X40	5000	6000	Ra>70	3000
09492.74.60.075	1X60	7500	6000	Ra>70	4200
09492.74.60.110	1X75	9370	6000	Ra>70	4200
09492.74.60.150	1X90	11250	6000	Ra>70	6000


PANOROMIC D




Colour
Options



Ral 7016



Body	Powder coated corrosion resistant aluminium
Optic	High light transmission acrylic optical lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

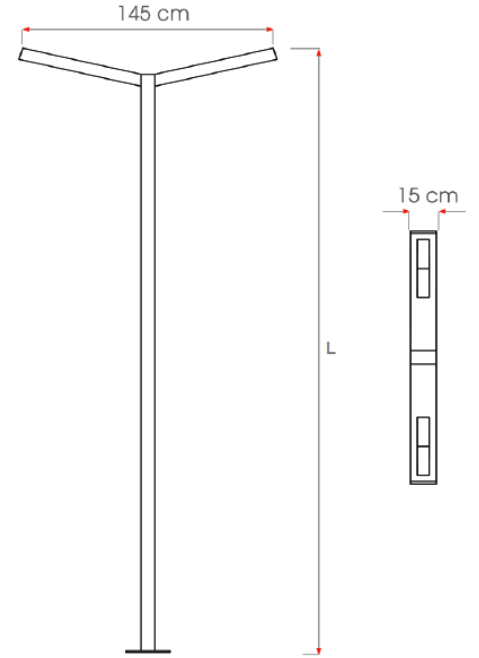


Order Code	W	Lm	CCT	CRI	L
09491.13.60.072	2X40	2x5000	6000	Ra>70	3000
09491.14.60.150	2X60	2x7500	6000	Ra>70	4200
09491.14.60.221	2X75	2x9375	6000	Ra>70	4200
09491.16.60.301	2X90	2x11250	6000	Ra>70	6000

FINGER L




**Colour
Options**

Ral 7016



Body	Powder coated corrosion resistant aluminium
Optic	Opal lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

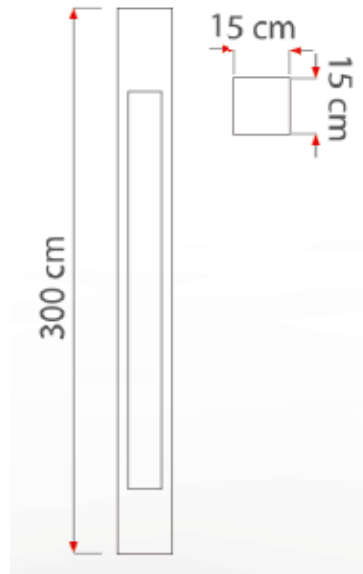

Order Code

09332.13.50.024

W

30

Lm

2400


CCT

5000

CRI

Ra>70


FINGER S

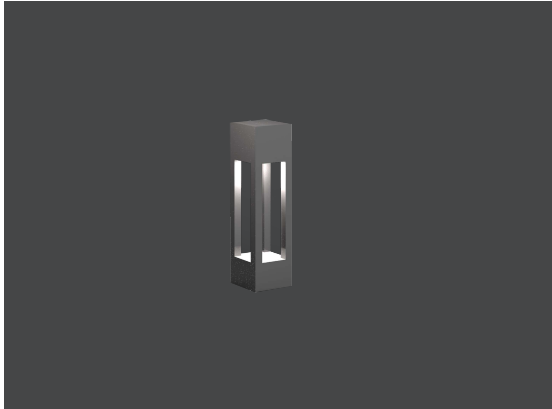


Colour
Options



Ral 7016



Body	Powder coated corrosion resistant aluminium
Optic	Opal lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

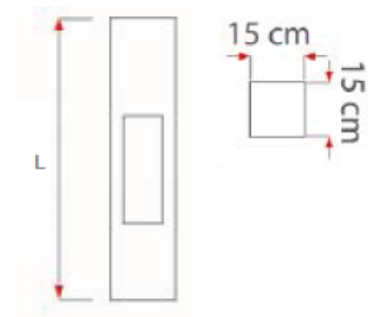

Order Code	W	Lm	CCT	CRI	L
09332.16.50.009	10	800	5000	Ra>70	600


ANTHILL B




Colour
Options



Ral 7016

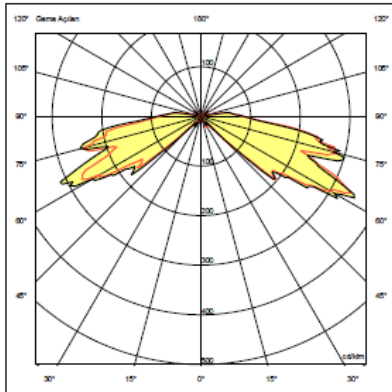

Body	Powder coated steel
Optic	Clear acrylic lens
Light Source	50,000 hours life high effective factor MidPower LED
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

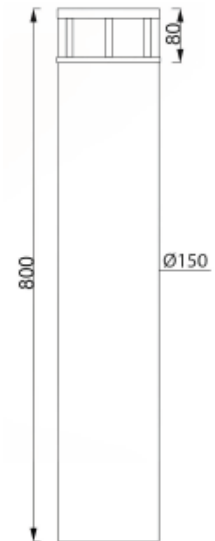

Order Code	W	Lm	CCT	CRI
09333.18.60.009	9	940	6000	Ra>70

ANTHILL K





Colour
Options



Ral 7016

Body	Powder coated corrosion resistant steel
Optic	Transparent acrylic lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-4000K

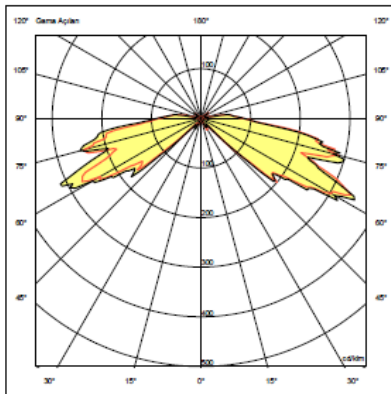


Order Code	W	Lm	CCT	CRI
09333.13.60.006	6	620	6000	Ra>70


PANORAMIC B



Renk
Seenekleri Ral 7016



Body	Powder coated corrosion resistant aluminium
Optic	High light transmission acrylic optical lens
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Opsiyon	Dali 3000K-4000K

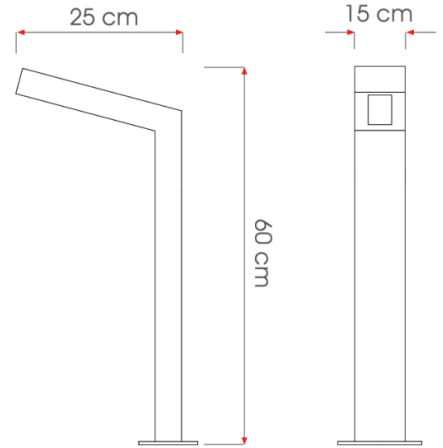

Order Code	W	Lm	CCT	CRI
09334.26.60.018	14	1760	6000	Ra>70
09334.26.60.028	22	2770	6000	Ra>70

2 | URBAN LIGHTING


FLIPPER





Colour Options



Ral 9005



Body	Electrostatic powder coated aluminium injection moulding
Optic	High light transmission acrylic optical lens
Glass	Tempered transparent
Light Source	L80B50 High Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	40 W -130 W -20C/+50C 160 W -20C/+40C
Option	Dali 3000K-5000K



Order Code	W	Lm	CCT	CRI	Wt
09277.24.40.056	40	5600	4000	Ra>70	8,3
09277.24.40.098	70	9800	4000	Ra>70	8,8
09277.34.40.140	100	14000	4000	Ra>70	8,3
09277.44.40.182	130	18200	4000	Ra>70	8,3
09277.44.40.230	165	23000	4000	Ra>70	8,3

SUNNY-R





Colour Options



Ral 9005

Body	Electrostatic powder coated aluminium
Optic	Asymmetric acrylic optical lens with high light transmission
Glass	Tempered transparent
Light Source	50,000 hours lifetime SMD High Power LED with high effective factor
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Option	Dali 3000K-5000K

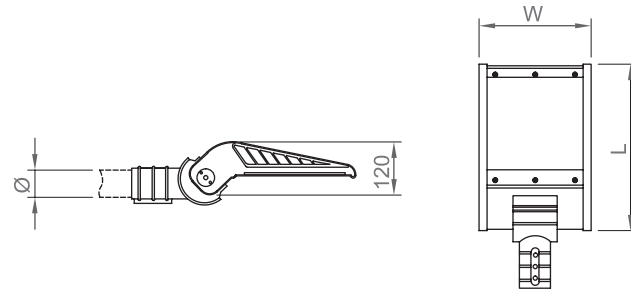


Order Code	W	Lm	CCT	CRI	W x L	Kg
09291.15.40.036	30	3600	4000	Ra>70	160x500	7,3
09291.25.40.077	76	7700	4000	Ra>70	255x500	7,3
09291.35.40.115	107	11100	4000	Ra>70	305x500	7,5
09291.45.40.162	151	16150	4000	Ra>70	405x500	7,9

3 | FACADE LIGHTING



ANEMON 340



Colour Options



Body	Matt anodised aluminium
Optic	High light transmission optical lens
Glass	Tempered transparent
Light Source	L80B50 Mid Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	-20C°/+50C°
Lens Angles	10°-25°-45°-120°
Option	Dali 5000K Red-Green-Blue-Amber

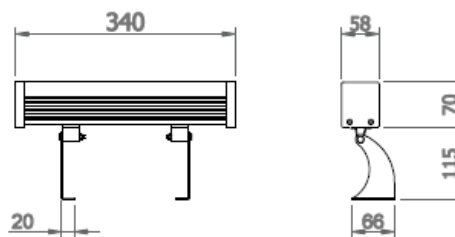



Order Code	W	Lm	CCT	CRI	Wt
05255.34.30.015	14	1540	3000	Ra>80	1,5
05255.34.40.016	14	1680	4000	Ra>80	1,5


ANEMON 650



Colour Options



Body	Matt anodised aluminium
Optic	High light transmission optical lens
Glass	Tempered transparent
Light Source	L80B50 Mid Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	-20C°/+50C°
Lens Angles	10°-25°-45°-120°
Option	Dali 5000K Red-Green-Blue-Amber


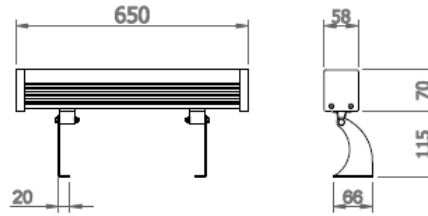


Order Code	W	Lm	CCT	CRI	Wt
05255.65.30.030.	29	3120	3000	Ra>80	2,9
05255.65.40.030	29	3480	4000	Ra>80	2,9


ANEMON 970



Colour Options



Body	Matt anodised aluminium
Optic	High light transmission optical lens
Glass	Tempered transparent
Light Source	L80B50 Mid Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	-20C°/+50C°
Lens Angles	10°-25°-45°-120°
Option	Dali 5000K Red-Green-Blue-Amber

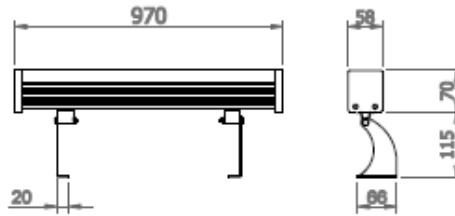

Order Code	W	Lm	CCT	CRI	L	Wt
05255.97.30.040	43	4730	3000	Ra>80	970	4,4
05255.97.40.040	43	5160	4000	Ra>80	970	4,4

ANEMON 1250



Colour Options



Ral 9016





Ral 9006



Ral 9005

Body	Matt anodised aluminium
Optic	High light transmission optical lens
Glass	Tempered transparent
Light Source	L80B50 Mid Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	-20C°/+50C°
Lens Angles	10°-25°-45°-120°
Option	Dali 5000K Red-Green-Blue-Amber

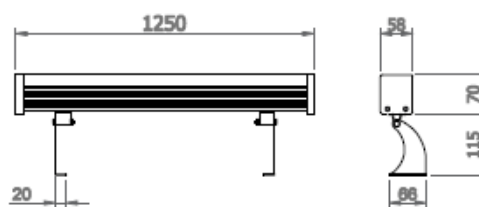



Order Code	W	Lm	CCT	CRI	Wt
05255.12.30.060	55	6050	3000	Ra>80	5,6
05255.12.40.060	55	6600	4000	Ra>80	5,6


POTENT F



Colour Options



Body	Electrostatic powder coated aluminium injection moulding
Optic	Transparent optical lens
Glass	Tempered transparent
Light Source	L80B50 Mid Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	-20C°/+50C°
Option	Dali 3 hours emergency lighting kit

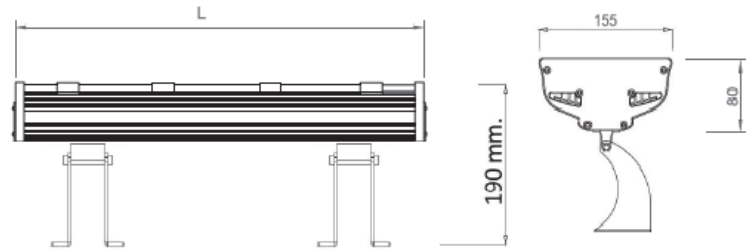

Order Code	W	Lm	CCT	CRI	L (mm)	Wt
07304.02.30.023	22	2350	3000	Ra>80	200	2,2
07304.03.30.047	43	4700	3000	Ra>80	370	3,3
07304.07.30.095	86	9500	3000	Ra>80	700	4,9
07304.02.40.025	22	2500	4000	Ra>80	200	2,2
07304.03.40.050	43	5000	4000	Ra>80	370	3,3
07304.07.40.098	86	9800	4000	Ra>80	700	4,9



4 | PROJECTORS




Colour Options



Ral 7016



Body	Electrostatic powder coated aluminium injection moulding
Optic	High light transmission acrylic optical lens
Glass	Tempered transparent
Light Source	L80B50 High Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	40 W-160 W -20C°/+50C° 160 -260W -20C°/+40C°
Light Angle	50°-25°
Option	Dali 3000K-5000K



Order Code	W	Lm	CCT	CRI	W x LxH	Wt
09394.44.40.084	70	8400	4000	Ra>70	400x490x90	8,9
09394.44.40.120	100	12000	4000	Ra>70	400x490x90	8,9
09394.44.40.156	130	15600	4000	Ra>70	400x490x90	8,9
09394.44.40.198	165	19800	4000	Ra>70	400x490x90	8,9
09394.44.40.240	200	24000	4000	Ra>70	490x600x100	13,6
09394.44.40.288	240	28800	4000	Ra>70	490x600x100	13,6
09394.44.40.312	260	31200	4000	Ra>70	490x600x100	13,6

SUNNY





Colour Options




Ral 9005

Body	Electrostatic powder coated aluminium
Optic	High light transmission acrylic optical lens
Glass	Tempered transparent
Light Source	L80B50 High Power LED with high efficacy factor with >50,000 hours lifetime
Driver	Constant current output, Pf>0.90
Input Voltage	220-240V/50-60Hz
Lens Angles	10°-25°-45°-120°
Option	54 W-100 W -20C°/+50C° 150W -20C°/+40C°

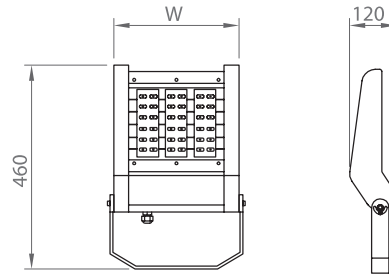

Order Code	W	Lm	CCT	CRI	W x L	Wt
09290.24.40.061	54	6100	4000	Ra>70	255x480	7,3
09290.24.40.077	76	7700	4000	Ra>70	255x480	7,3
09290.34.40.111	100	11100	4000	Ra>70	305x480	7,5
09290.44.40.162	151	16150	4000	Ra>70	405x480	7,9


Please visit our website for updated information. www.ikizleraydinlatma.com

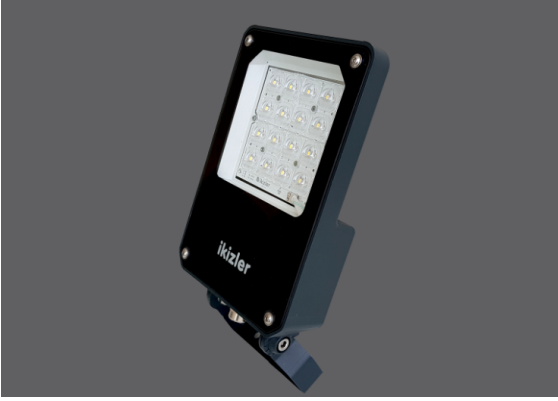



Colour Options




Ral 9005

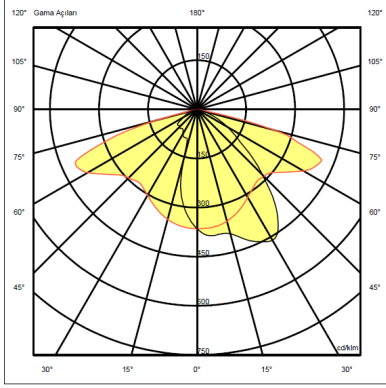


Body	Elektrostatik toz boyalı alüminyum enjeksiyon
Optic	Şeffaf optik lens
Glass	Temperli şeffaf
Light Source	L80B50>50.000 saat ömürlü yüksek etkinlik faktörüne sahip High Power LED
Driver	Sabit akım çıkışlı, Pf>0.90
Input Voltage	220-240V/50-60Hz
Operating Temperature	-25C°/+50C°
Lens Angles	60°-120°Asimmetric
Option	Dali

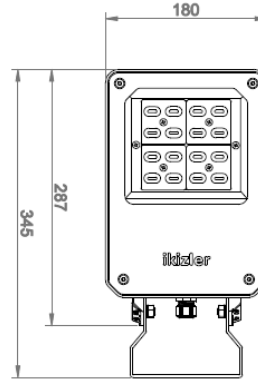

Wall Mounting Option



Direct Mounting Option



Order Code	W	Lm	CCT	CRI	Wt
09294.23.30.030	26	3070	3000	Ra>70	2,4
09294.23.30.038	34	3840	3000	Ra>70	2,4
09294.23.30.043	40	4512	3000	Ra>70	2,4
09294.23.40.032	26	3200	4000	Ra>70	2,4
09294.23.40.040	34	4000	4000	Ra>70	2,4
09294.23.40.045	40	4700	4000	Ra>70	2,4

Head Office

Address Girne Mah. Irmaklar Sok. Küçükalyalı İş Merkezi
F Blok No: 72/18 Maltepe / İSTANBUL - TURKEY
Post Code: 34852
Phone +90 (216) 397 22 16
Fax +90 (216) 397 19 19
E-Mail info@ikizlerlighting.com

Factory

Address 3.Organize San. Böl. 1. Yol. No: 68
Soğucak Köyü Söğütli / SAKARYA - TURKEY
Phone +90 (264) 290 40 10-11
Fax +90 (264) 290 40 12

www.ikizlerlighting.com