

SPEEDLINE

01180


Industrial Pendant and Surface Mounted Lighting Luminaire


The Speedline Series is a linear lighting solution developed for industrial and commercial spaces with its simple and functional design. Thanks to its interlocking diffuser structure, it provides homogeneous light distribution while supporting the product's integrated and clean appearance.

Offering long-lasting use with its aluminum housing and durable design details, Speedline provides efficient lighting in offices, production areas, technical rooms, and general interior applications.

Available for pendant and surface mounting options, the Speedline Series adapts to different application needs and offers project-specific solutions with various lengths, color temperatures, and control options.

RAL 9016 RAL 9005 RAL 9006

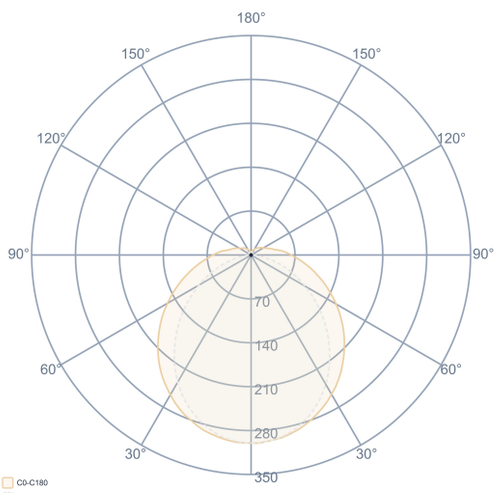

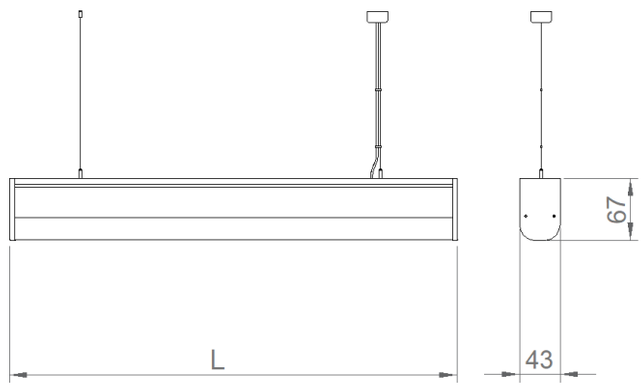

General Information	
Housing	Aluminum Extruded
Side Cover	Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	43(W) x 67(H)
Mounting Type	Surface and Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	14-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01180.46.30.013	14	1670	3000	580	0,60
01180.46.40.014	14	1800	4000	580	0,60
01180.46.30.027	27	3220	3000	1130	1,10
01180.46.40.030	27	3580	4000	1130	1,10
01180.46.30.041	41	4890	3000	1680	1,50
01180.46.40.044	41	5450	4000	1680	1,50

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com