

Sumba

Indoor Lighting - Industrial Lighting



TECHNICAL INFORMATION

Housing	Aluminum Extrusion Profile
Side Cover	PC Injection
Diffuser	Opal Diffuser
Paint	Anodized Coating
Dimensions(mm)	65(W) x 87(H)

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	130°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	19-48W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Metal Bracket

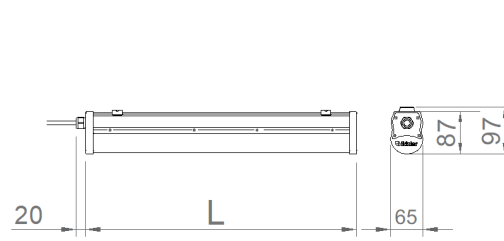

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07102.06.30.021	19	2370	3000	Ra>80	65x600x87	1,4
07102.06.40.022	19	2450	4000	Ra>80	65x600x87	1,4
07102.09.30.022	20	2360	3000	Ra>80	65x880x87	2,0
07102.09.40.023	20	2450	4000	Ra>80	65x880x87	2,0
07102.09.30.031	29	3400	3000	Ra>80	65x880x87	2,0
07102.09.40.032	29	3740	4000	Ra>80	65x880x87	2,0
07102.09.30.042	42	4740	3000	Ra>80	65x880x87	2,0
07102.09.40.044	42	5200	4000	Ra>80	65x880x87	2,0
07102.12.30.029	29	2900	3000	Ra>80	65x1160x87	2,7
07102.12.40.030	29	3080	4000	Ra>80	65x1160x87	2,7
07102.12.30.042	40	4500	3000	Ra>80	65x1160x87	2,7
07102.12.40.043	40	4840	4000	Ra>80	65x1160x87	2,7
07102.15.30.051	48	5800	3000	Ra>80	65x1440x87	3,3
07102.15.40.053	48	6300	4000	Ra>80	65x1440x87	3,3

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com

