


DUET-R


01189


Flexible Routing

Duet-R is our steerable linear spotlight product developed for track lighting systems. With its glare-reducing reflector and UGR≤16 optical structure, it effectively controls glare, offering superior visual comfort. Its movable body allows for precise light direction to the desired point, while the 36° controlled light angle highlights products, objects, and architectural details. With its modern design and high performance, it combines aesthetics and functionality in stores, showrooms, galleries, museums, and other commercial interior applications.

RAL 9016 RAL 9005 RAL 9006

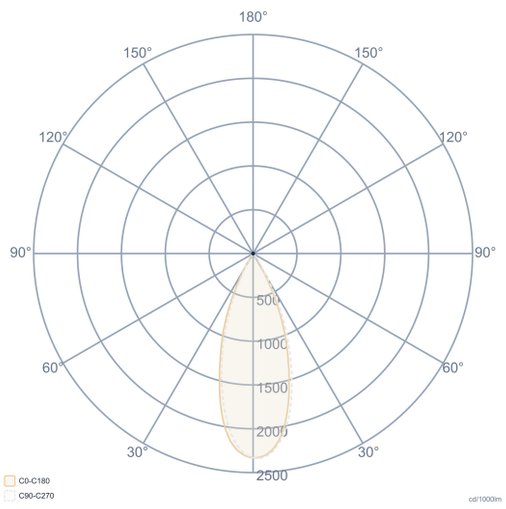





General Information	
Housing	Aluminum Extrusion
Side Cover	Aluminum Injection
Optics	PMMA Lens + Reflector
Paint	Electrostatic Powder Paint
Insulation Class	Class II
Product Dimensions [mm]	145(W) x 36(L) x 102(H)
Mounting Type	Rail Socket and Surface
Mounting Part	Rail Socket

Electrical Info	
Power	11-33W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current Output Rail Drive
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Kg
01189.37.30.011	11	920	36°	3000	145x36x102	0,45
01189.37.40.012	11	1020	36°	4000	145x36x102	0,45
01189.37.30.021	22	1840	36°	3000	280x36x102	0,75
01189.37.40.022	22	2040	36°	4000	280x36x102	0,75
01189.37.30.036	33	2760	36°	3000	430x36x102	1,15
01189.37.40.038	33	3060	36°	4000	430x36x102	1,15

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com