



LINEAR

07201

Uninterrupted Power - Flexible Lighting The Linear Lighting Unit is a lighting module developed for continuous lighting systems. By transmitting energy from a single supply point along the line, it offers the advantages of quick installation, low cabling costs, and easy maintenance in long lines. Thanks to its modular structure, the lighting units can be easily placed or replaced where needed.
It adapts to different applications with 90° symmetrical, 60x90° symmetrical, 25° asymmetrical, and double 25° asymmetrical light distribution options. It offers energy-efficient performance with system efficiency up to 144 lm/W. It provides quick installation and long-lasting use by creating a continuous lighting infrastructure in warehouses, logistics centers, chain stores, and large industrial areas.

RAL 9016 RAL 9005

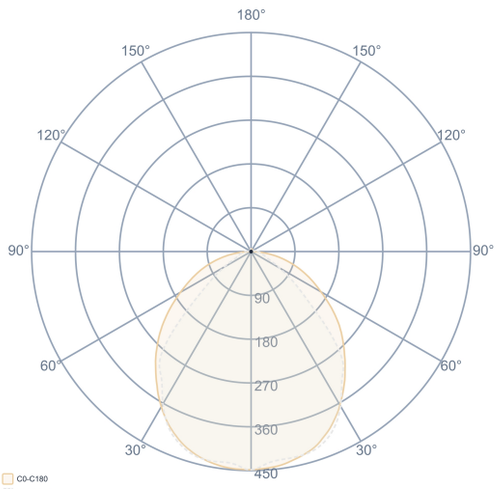

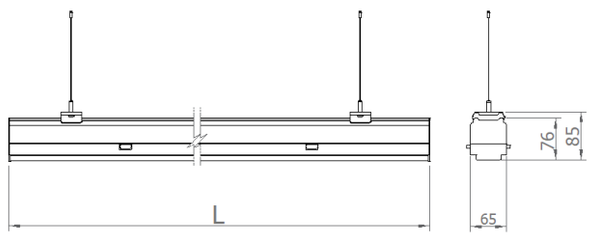

General Information	
Housing	Electrostatic Powder Coated Aluminum
Optics	Optical Lens
Side Cover	PC Injection
Insulation Class	Class I
Product Dimensions [mm]	65(W)x32(H)

Electrical Info	
Power	50-76W
Power Factor	>0.95
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20 °C/+40 °C
LED Lifetime L70	>102.000 Hours

Lighting Technology	
Light Output Angle	90° / 60°x90° / 25° / 2x25°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Kit (1h/3h)

Order Code	W	Lm	CCT	Angle	L (mm)	Kg
07201.11.40.073/90	50	7300	4000	90°	1140	1,20
07201.14.40.100/90	63	10000	4000	90°	1421	1,50
07201.17.40.120/90	76	12000	4000	90°	1702	1,80
07201.11.40.073/60	50	7300	4000	60°x90°	1140	1,20
07201.14.40.100/60	63	10000	4000	60°x90°	1421	1,50
07201.17.40.120/60	76	12000	4000	60°x90°	1702	1,80
07201.11.40.073/AS	50	7300	4000	AS/25°	1140	1,20
07201.14.40.100/AS	63	10000	4000	AS/25°	1421	1,50
07201.17.40.120/AS	76	12000	4000	AS/25°	1702	1,80
07201.11.40.073/AS2	50	7300	4000	AS/2x25°	1140	1,20
07201.11.40.100/AS2	63	10000	4000	AS/2x25°	1421	1,50
07201.11.40.120/AS2	76	12000	4000	AS/2x25°	1702	1,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com