

Drax Batwing

Indoor Lighting - Waterproof



Colour Options



Ral 9006

TECHNICAL INFORMATION

Housing CO-EX Extrusion PC Profile
Side Cover PC Injection + Silicone Gasket
Diffuser Batwing Lens + PC Opal

OPTICAL SPECIFICATIONS

Optics High Efficiency Batwing Lens
Light Output Angle 165°x130°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL




Power (W) 21-54W
Power Factor >0.95
Light Source Mid Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI - 1-10V DIM
- DC Operation Mode - Emergency Lighting Unit
- CRI > 90 - 2700K ~ 6500K
- Class-II Protection Class - PIR Sensor

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

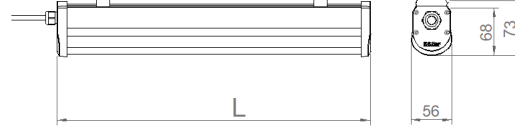

Order Code	W	Lm	Angle	CCT	CRI	L (mm)	Kg
07110.12.40.043	43	5160	165°-130°	4000K	Ra>80	1140	1,0

